


**SHOULDER SIX** **EXSIX** Type

# Double sided insert with 6 cutting edge

# SHOULDER SIX

**Unique 3D insert**  
 Due to arch-geometry on the peripheral cutting edge, cusp height can be smaller even in case of large ap.


**Achieves low cutting force**  
 Achieves high efficient & high precision machining for side walls.

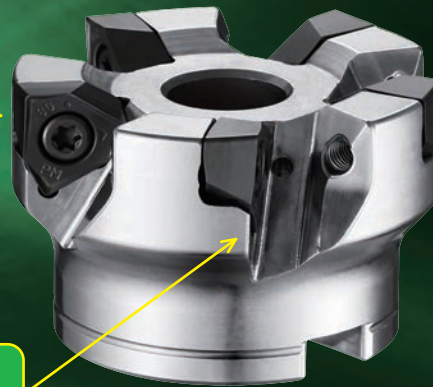

**Features**

This tool can accommodate an array of applications such as face milling, slotting and plunging. The unique 3D design of the insert has 6 positive axial cutting edges which decreases tool pressure.

Double - sided insert with 6 cutting edge.  
 The robust insert is 7.5mm in thickness allowing for stable machining and longer tool life.



ISO	P					M					K			H		
	P01	P10	P20	P30	P40	M01	M10	M20	M30	M40	K01	K10	K20	K30	H01	H10
Range	JC8118					JC8118					JC8118			JC8118		
	JC8050			JC8050			JC8050									

# SHOULDER SIX

# EXSIX Type

■ EXSIX Type -Shoulder Milling

● Double-sided 6 Cutting-edge insert

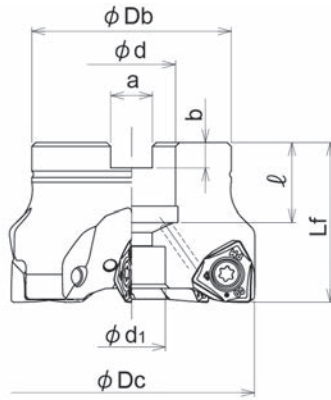


Fig.1  
(Through coolant hole)

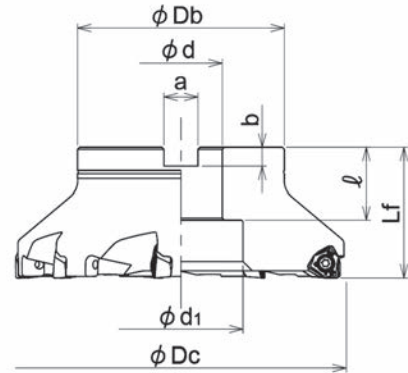



Fig.2  
(No coolant hole)

Cat.No.	Stock	No. of inserts	Dimensions (mm)								Arbor set bolt	Weight (kg)	Inserts	Fig.
			$\phi Dc$	$L_f$	$\phi Db$	$\phi d$	$\phi d_1$	a	b	$\ell$				
EXSIX-4050R-22	●	4	50	40	47	22	14	10.4	6.3	20	M10X1.5X25*	0.33	YCMU0907**ZER-PM	1
EXSIX-4052R-22	●		52								M10X1.5X25*	0.35		
EXSIX-5063R-22	●	5	63	50	17	10.4	6.3	20	M10	0.50				
EXSIX-5066R-22	●		66						M10	0.53				
EXSIX-6080R-27	●	6	80	50	56	27	20	12.4	7	22	M12X1.75X30*	0.93		
EXSIX-7100R-32	●	7	100		85	32	26	14.4	8	25	M16X2X30*	1.88		
EXSIX-8125R-40	●	8	125	63	100	40	32	16.4	9	32	M20X2.5X40*	3.62		
EXSIX-9160R-40	●	9	160				60				35	M20		

Screw	Torque(N.m)	Wrench
CSW-513H	5.5	A-20

**SHOULDER SIX** **EXSIX** Type

■ Insert

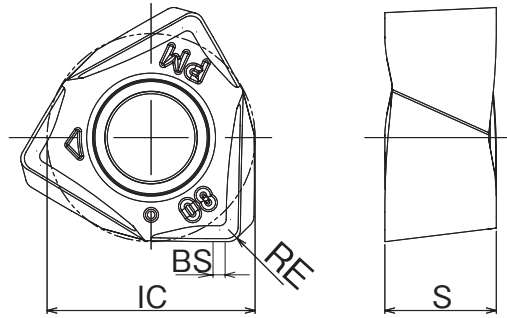

Cat.No.	Tolerance	PVD Coating		Dimensions (mm)			
		JC8050	JC8118	RE	BS	IC	S
YCMU090708ZER-PM	M	●	●	0.8	1.41	14	7.5
YCMU090716ZER-PM		●	●	1.6	0.62		

**GRADE MARKING**

JC8050

JC8118

**SHOULDER SIX****EXSIX Type**

■ Recommended cutting conditions

● Shoulder milling

Material	Grade	Tool dia.(mm)									
		50/52					63/66				
		4N					5N				
		r (mm)	ap (mm)	ap×ae (mm <sup>2</sup> )	n (min <sup>-1</sup> )	Vf (mm/min)	r (mm)	ap (mm)	ap×ae (mm <sup>2</sup> )	n (min <sup>-1</sup> )	Vf (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8050	~100	~9.0	~45	1,270	1,520	~100	~9.0	~45	1,010	1,770
		150	~8.0	~30	1,150	1,150	150	~8.0	~30	910	1,370
		200	~7.0	~20	1,020	820	200	~7.0	~20	810	1,010
Cast steel (GM190, LCD5) below 285HB	JC8050	~100	~9.0	~45	1,150	1,380	~100	~9.0	~45	910	1,590
		150	~8.0	~30	1,020	1,020	150	~8.0	~30	810	1,220
		200	~7.0	~20	890	710	200	~7.0	~20	710	890
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	~100	~9.0	~45	1,270	1,520	~100	~9.0	~45	1,010	1,770
		150	~8.0	~30	1,150	1,150	150	~8.0	~30	910	1,370
		200	~7.0	~20	1,020	820	200	~7.0	~20	810	1,010
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	~100	~9.0	~45	950	1,140	~100	~9.0	~45	760	1,330
		150	~8.0	~30	860	860	150	~8.0	~30	680	1,020
		200	~7.0	~20	760	610	200	~7.0	~20	610	760
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	~100	~9.0	~30	760	760	~100	~9.0	~30	610	760
		150	~8.0	~25	670	540	150	~8.0	~25	530	530
		200	~7.0	~15	570	340	200	~7.0	~15	450	340
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	~100	~9.0	~25	640	510	~100	~9.0	~25	510	510
		150	~8.0	~15	570	340	150	~8.0	~15	450	340
		200	~7.0	~8	510	200	200	~7.0	~8	400	200
Grey cast iron (FC250) 160-260HB	JC8118	~100	~9.0	~45	1,590	1,910	~100	~9.0	~45	1,260	2,210
		150	~8.0	~30	1,460	1,460	150	~8.0	~30	1,160	1,740
		200	~7.0	~20	1,340	1,070	200	~7.0	~20	1,060	1,330
Nodular cast iron (FCD700) 170-300HB	JC8118	~100	~9.0	~45	950	950	~100	~9.0	~45	760	1,140
		150	~8.0	~30	830	660	150	~8.0	~30	660	830
		200	~7.0	~20	700	420	200	~7.0	~20	560	560
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	~100	~9.0	~45	760	610	~100	~9.0	~45	610	610
		150	~8.0	~30	700	420	150	~8.0	~30	560	420
		200	~7.0	~20	640	260	200	~7.0	~20	510	260
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	~100	~9.0	~45	1,150	1,150	~100	~9.0	~45	910	1,370
		150	~8.0	~30	1,020	820	150	~8.0	~30	810	1,010
		200	~7.0	~20	890	530	200	~7.0	~20	710	710

Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce ap or rpm and keep feed per tooth.
3. ap should be reduced when using on low rigidity machine.
4. Use air blow.

**SHOULDER SIX****EXSIX Type**

## ■ Recommended cutting conditions

## ● Shoulder milling

Material	Grade	Tool dia.(mm)									
		80					100				
		6N					7N				
		r (mm)	a <sub>p</sub> (mm)	a <sub>p</sub> ×a <sub>e</sub> (mm <sup>2</sup> )	n (min <sup>-1</sup> )	V <sub>f</sub> (mm/min)	r (mm)	a <sub>p</sub> (mm)	a <sub>p</sub> ×a <sub>e</sub> (mm <sup>2</sup> )	n (min <sup>-1</sup> )	V <sub>f</sub> (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8050	~100	~9.0	~45	800	1,680	~100	~9.0	~45	640	1,570
		150	~8.0	~30	720	1,300	150	~8.0	~30	570	1,200
		200	~7.0	~20	640	960	200	~7.0	~20	510	890
Cast steel (GM190, ICD5) below 285HB	JC8050	~100	~9.0	~45	720	1,510	~100	~9.0	~45	570	1,400
		150	~8.0	~30	640	1,150	150	~8.0	~30	510	1,070
		200	~7.0	~20	560	840	200	~7.0	~20	450	790
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	~100	~9.0	~45	800	1,680	~100	~9.0	~45	640	1,570
		150	~8.0	~30	720	1,300	150	~8.0	~30	570	1,200
		200	~7.0	~20	640	960	200	~7.0	~20	510	890
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	~100	~9.0	~45	600	1,260	~100	~9.0	~45	480	1,180
		150	~8.0	~30	540	970	150	~8.0	~30	430	900
		200	~7.0	~20	480	720	200	~7.0	~20	380	670
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	~100	~9.0	~30	480	720	~100	~9.0	~30	380	670
		150	~8.0	~25	420	500	150	~8.0	~25	330	460
		200	~7.0	~15	360	320	200	~7.0	~15	290	300
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	~100	~9.0	~25	400	480	~100	~9.0	~25	320	450
		150	~8.0	~15	360	320	150	~8.0	~15	290	300
		200	~7.0	~8	320	190	200	~7.0	~8	250	180
Grey cast iron (FC250) 160-260HB	JC8118	~100	~9.0	~45	990	2,080	~100	~9.0	~45	800	1,960
		150	~8.0	~30	920	1,660	150	~8.0	~30	730	1,530
		200	~7.0	~20	840	1,260	200	~7.0	~20	670	1,170
Nodular cast iron (FCD700) 170-300HB	JC8118	~100	~9.0	~45	600	1,080	~100	~9.0	~45	480	1,010
		150	~8.0	~30	520	780	150	~8.0	~30	410	720
		200	~7.0	~20	440	530	200	~7.0	~20	350	490
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	~100	~9.0	~45	480	580	~100	~9.0	~45	380	530
		150	~8.0	~30	440	400	150	~8.0	~30	350	370
		200	~7.0	~20	400	240	200	~7.0	~20	320	220
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	~100	~9.0	~45	720	1,300	~100	~9.0	~45	570	1,200
		150	~8.0	~30	640	960	150	~8.0	~30	510	890
		200	~7.0	~20	560	670	200	~7.0	~20	450	630

## Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce a<sub>p</sub> or rpm and keep feed per tooth.
3. a<sub>p</sub> should be reduced when using on low rigidity machine.
4. Use air blow.

**SHOULDER SIX**

**EXSIX Type**

■ Recommended cutting conditions

● Shoulder milling

Material	Grade	Tool dia.(mm)									
		125					160				
		8N					9N				
		r (mm)	ap (mm)	ap×ae (mm <sup>2</sup> )	n (min <sup>-1</sup> )	Vf (mm/min)	r (mm)	ap (mm)	ap×ae (mm <sup>2</sup> )	n (min <sup>-1</sup> )	Vf (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8050	~100	~9.0	~45	510	1,430	~100	~9.0	~45	400	1,260
		150	~8.0	~30	460	1,100	150	~8.0	~30	360	970
		200	~7.0	~20	410	820	200	~7.0	~20	320	720
Cast steel (GM190, ICD5) below 285HB	JC8050	~100	~9.0	~45	460	1,290	~100	~9.0	~45	360	1,130
		150	~8.0	~30	410	980	150	~8.0	~30	320	860
		200	~7.0	~20	360	720	200	~7.0	~20	280	630
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	~100	~9.0	~45	510	1,430	~100	~9.0	~45	400	1,260
		150	~8.0	~30	460	1,100	150	~8.0	~30	360	970
		200	~7.0	~20	410	820	200	~7.0	~20	320	720
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	~100	~9.0	~45	380	1,060	~100	~9.0	~45	300	950
		150	~8.0	~30	340	820	150	~8.0	~30	270	730
		200	~7.0	~20	310	620	200	~7.0	~20	240	540
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	~100	~9.0	~30	310	620	~100	~9.0	~30	240	540
		150	~8.0	~25	270	430	150	~8.0	~25	210	380
		200	~7.0	~15	230	280	200	~7.0	~15	180	240
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	~100	~9.0	~25	250	400	~100	~9.0	~25	200	360
		150	~8.0	~15	230	280	150	~8.0	~15	180	240
		200	~7.0	~8	200	160	200	~7.0	~8	160	140
Grey cast iron (FC250) 160-260HB	JC8118	~100	~9.0	~45	640	1,790	~100	~9.0	~45	500	1,580
		150	~8.0	~30	590	1,420	150	~8.0	~30	460	1,240
		200	~7.0	~20	530	1,060	200	~7.0	~20	420	950
Nodular cast iron (FCD700) 170-300HB	JC8118	~100	~9.0	~45	380	910	~100	~9.0	~45	300	810
		150	~8.0	~30	330	660	150	~8.0	~30	260	590
		200	~7.0	~20	280	450	200	~7.0	~20	220	400
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	~100	~9.0	~45	310	500	~100	~9.0	~45	240	430
		150	~8.0	~30	280	340	150	~8.0	~30	220	300
		200	~7.0	~20	250	200	200	~7.0	~20	200	180
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	~100	~9.0	~45	460	1,100	~100	~9.0	~45	360	970
		150	~8.0	~30	410	820	150	~8.0	~30	320	720
		200	~7.0	~20	360	580	200	~7.0	~20	280	500

Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce ap or rpm and keep feed per tooth.
3. ap should be reduced when using on low rigidity machine.
4. Use air blow.

**SHOULDER SIX****EXSIX Type**

## ■ Recommended cutting conditions

## ● Face milling

Material	Grade	Tool dia.(mm)									
		50/52					63/66				
		4N					5N				
		r (mm)	a <sub>p</sub> (mm)	a <sub>e</sub> (mm)	n (min <sup>-1</sup> )	V <sub>f</sub> (mm/min)	r (mm)	a <sub>p</sub> (mm)	a <sub>e</sub> (mm)	n (min <sup>-1</sup> )	V <sub>f</sub> (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8050	~150	~4.0	~1.0Dc	950	1,140	~150	~4.0	~1.0Dc	760	1,330
		200	~3.0	~40	830	830	200	~3.0	~55	660	990
		300	~2.0	~30	700	560	300	~2.0	~40	560	700
Cast steel (GM190, ICD5) below 285HB	JC8050	~150	~4.0	~1.0Dc	950	1,140	~150	~4.0	~1.0Dc	760	1,330
		200	~3.0	~40	830	830	200	~3.0	~55	660	990
		300	~2.0	~30	700	560	300	~2.0	~40	560	700
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	~150	~4.0	~1.0Dc	950	950	~150	~4.0	~1.0Dc	760	1,140
		200	~3.0	~40	830	660	200	~3.0	~55	660	830
		300	~2.0	~30	700	420	300	~2.0	~40	560	560
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	~150	~4.0	~1.0Dc	830	830	~150	~4.0	~1.0Dc	660	990
		200	~3.0	~40	760	610	200	~3.0	~55	610	760
		300	~2.0	~30	700	420	300	~2.0	~40	560	560
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	~150	~3.0	~1.0Dc	700	700	~150	~3.0	~1.0Dc	560	700
		200	~2.5	~40	640	510	200	~2.5	~55	510	510
		300	~1.5	~30	570	340	300	~1.5	~40	450	340
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	~150	~2.5	~40	570	460	~150	~2.5	~55	450	450
		200	~2.0	~30	510	310	200	~2.0	~40	400	300
		300	~1.5	~20	450	180	300	~1.5	~32	350	180
Grey cast iron (FC250) 160-260HB	JC8118	~150	~6.0	~1.0Dc	1,150	1,380	~150	~6.0	~1.0Dc	910	1,590
		200	~4.0	~40	950	950	200	~4.0	~55	760	1,140
		300	~2.0	~30	830	660	300	~2.0	~40	660	830
Nodular cast iron (FCD700) 170-300HB	JC8118	~150	~4.0	~1.0Dc	830	830	~150	~4.0	~1.0Dc	660	990
		200	~3.0	~40	760	610	200	~3.0	~55	610	760
		300	~2.0	~30	700	420	300	~2.0	~40	560	560
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	~150	~4.0	~40	700	560	~150	~4.0	~55	560	560
		200	~3.0	~30	640	380	200	~3.0	~40	510	380
		300	~2.0	~20	570	230	300	~2.0	~32	450	230
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	~150	~4.0	~1.0Dc	950	950	~150	~4.0	~1.0Dc	760	1,140
		200	~3.0	~40	830	660	200	~3.0	~55	660	830
		300	~2.0	~30	700	420	300	~2.0	~40	560	560

## Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce a<sub>p</sub> or rpm and keep feed per tooth.
3. a<sub>p</sub> should be reduced when using on low rigidity machine.
4. Use air blow.
5. In case of slot milling, apply 50% or less feed (V<sub>f</sub>) from standard cutting condition table.
6. Ramping and helical interpolation are not recommended.

**SHOULDER SIX****EXSIX Type**

## ■ Recommended cutting conditions

## ● Face milling

Material	Grade	Tool dia.(mm)									
		80					100				
		6N					7N				
		r (mm)	ap (mm)	ae (mm)	n (min <sup>-1</sup> )	Vf (mm/min)	r (mm)	ap (mm)	ae (mm)	n (min <sup>-1</sup> )	Vf (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8050	~150	~4.0	~80	600	1,260	~150	~4.0	~100	480	1,010
		200	~3.0	~65	520	940	200	~3.0	~80	410	720
		300	~2.0	~50	440	660	300	~2.0	~60	350	490
Cast steel (GM190, ICD5) below 285HB	JC8050	~150	~4.0	~80	600	1,260	~150	~4.0	~100	480	1,010
		200	~3.0	~65	520	940	200	~3.0	~80	410	720
		300	~2.0	~50	440	660	300	~2.0	~60	350	490
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	~150	~4.0	~80	600	1,080	~150	~4.0	~100	480	840
		200	~3.0	~65	520	780	200	~3.0	~80	410	570
		300	~2.0	~50	440	530	300	~2.0	~60	350	370
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	~150	~4.0	~80	520	940	~150	~4.0	~100	410	720
		200	~3.0	~65	480	720	200	~3.0	~80	380	530
		300	~2.0	~50	440	530	300	~2.0	~60	350	370
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	~150	~3.0	~80	440	660	~150	~3.0	~100	350	490
		200	~2.5	~65	400	480	200	~2.5	~80	320	340
		300	~1.5	~50	360	320	300	~1.5	~60	290	200
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	~150	~2.5	~65	360	430	~150	~2.5	~80	290	300
		200	~2.0	~50	320	290	200	~2.0	~60	250	180
		300	~1.5	~35	280	170	300	~1.5	~40	220	150
Grey cast iron (FC250) 160-260HB	JC8118	~150	~6.0	~80	720	1,510	~150	~6.0	~100	570	1,200
		200	~4.0	~65	600	1,080	200	~4.0	~80	480	840
		300	~2.0	~50	520	780	300	~2.0	~60	410	570
Nodular cast iron (FCD700) 170-300HB	JC8118	~150	~4.0	~80	520	940	~150	~4.0	~100	410	720
		200	~3.0	~65	480	720	200	~3.0	~80	380	530
		300	~2.0	~50	440	530	300	~2.0	~60	350	370
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	~150	~4.0	~65	440	530	~150	~4.0	~80	350	370
		200	~3.0	~50	400	360	200	~3.0	~60	320	220
		300	~2.0	~35	360	220	300	~2.0	~40	290	200
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	~150	~4.0	~80	600	1,080	~150	~4.0	~100	480	840
		200	~3.0	~65	520	780	200	~3.0	~80	410	570
		300	~2.0	~50	440	530	300	~2.0	~60	350	370

## Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce ap or rpm and keep feed per tooth.
3. ap should be reduced when using on low rigidity machine.
4. Use air blow.
5. In case of slot milling, apply 50% or less feed (Vf) from standard cutting condition table.
6. Ramping and helical interpolation are not recommended.



**SHOULDER SIX****EXSIX Type**

## ■ Recommended cutting conditions

## ● Face milling

Material	Grade	Tool dia.(mm)									
		125					160				
		8N					9N				
		r (mm)	a <sub>p</sub> (mm)	a <sub>e</sub> (mm)	n (min <sup>-1</sup> )	V <sub>f</sub> (mm/min)	r (mm)	a <sub>p</sub> (mm)	a <sub>e</sub> (mm)	n (min <sup>-1</sup> )	V <sub>f</sub> (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8050	~150	~4.0	~125	380	910	~150	~4.0	~160	300	810
		200	~3.0	~100	330	660	200	~3.0	~130	260	590
		300	~2.0	~75	280	450	300	~2.0	~95	220	400
Cast steel (GM190, ICD5) below 285HB	JC8050	~150	~4.0	~125	380	910	~150	~4.0	~160	300	810
		200	~3.0	~100	330	660	200	~3.0	~130	260	590
		300	~2.0	~75	280	450	300	~2.0	~95	220	400
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	~150	~4.0	~125	380	760	~150	~4.0	~160	300	680
		200	~3.0	~100	330	530	200	~3.0	~130	260	470
		300	~2.0	~75	280	340	300	~2.0	~95	220	300
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	~150	~4.0	~125	330	660	~150	~4.0	~160	260	590
		200	~3.0	~100	310	500	200	~3.0	~130	240	430
		300	~2.0	~75	280	340	300	~2.0	~95	220	300
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	~150	~3.0	~125	280	450	~150	~3.0	~160	220	400
		200	~2.5	~100	250	300	200	~2.5	~130	200	270
		300	~1.5	~75	230	180	300	~1.5	~95	180	160
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	~150	~2.5	~100	230	280	~150	~2.5	~130	180	240
		200	~2.0	~75	200	160	200	~2.0	~95	160	140
		300	~1.5	~50	180	140	300	~1.5	~60	140	130
Grey cast iron (FC250) 160-260HB	JC8118	~150	~6.0	~125	460	1,100	~150	~6.0	~160	360	970
		200	~4.0	~100	380	760	200	~4.0	~130	300	680
		300	~2.0	~75	330	530	300	~2.0	~95	260	470
Nodular cast iron (FCD700) 170-300HB	JC8118	~150	~4.0	~125	330	660	~150	~4.0	~160	260	590
		200	~3.0	~100	310	500	200	~3.0	~130	240	430
		300	~2.0	~75	280	340	300	~2.0	~95	220	300
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	~150	~4.0	~100	280	340	~150	~4.0	~130	220	300
		200	~3.0	~75	250	200	200	~3.0	~95	200	180
		300	~2.0	~50	230	180	300	~2.0	~60	180	160
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	~150	~4.0	~125	380	760	~150	~4.0	~160	300	680
		200	~3.0	~100	330	530	200	~3.0	~130	260	470
		300	~2.0	~75	280	340	300	~2.0	~95	220	300

## Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce a<sub>p</sub> or rpm and keep feed per tooth.
3. a<sub>p</sub> should be reduced when using on low rigidity machine.
4. Use air blow.
5. In case of slot milling, apply 50% or less feed (V<sub>f</sub>) from standard cutting condition table.
6. Ramping and helical interpolation are not recommended.

**SHOULDER SIX****EXSIX Type**

## ■ Recommended cutting conditions

## ● Plunge milling

Material	Grade	Vc(m/min)	fz(mm/t)	ae(mm)	P f(mm)
Carbon steel (S50C, S55C) below 250HB	JC8050	180	0.25	~5	~0.5Dc
Cast steel (GM190, ICD5) below 285HB	JC8050	160	0.25	~5	~0.5Dc
Tool & die steel (SKD61, SKD11) below 255HB	JC8050	180	0.2	~5	~0.5Dc
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8118	130	0.2	~5	~0.5Dc
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8118	100	0.15	~5	~0.5Dc
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8118	90	0.1	~5	~0.5Dc
Grey cast iron (FC250) 160-260HB	JC8118	200	0.3	~5	~0.5Dc
Nodular cast iron (FCD700) 170-300HB	JC8118	130	0.2	~5	~0.5Dc
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8050	110	0.15	~5	~0.5Dc
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8118	160	0.2	~5	~0.5Dc

## Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. In case of chatter occurring, recommended to reduce ap or rpm and keep feed per tooth.
3. ap should be reduced when using on low rigidity machine.
4. Use air blow..