

MHRH430R



Size $\phi 0.1 \times R0.01 \sim \phi 6 \times R1$



MUGEN COATING PREMIUM 4-Flute Long Neck Radius End Mill for Hardened Steel

Total 336 sizes

4-flute long neck corner radius end mill for prehardened steels and hardened steels (~65HRC). Maximum L/D=16

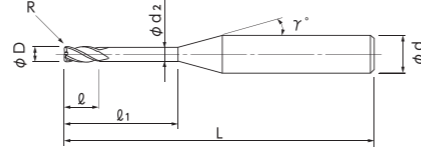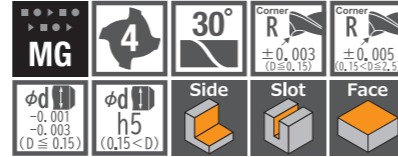

Size	Diameter Tolerance	Corner R Tolerance	Shank Dia. Tolerance
D ≤ 0.15	0 -0.007	±0.003	-0.001* -0.003
0.15 < D < 0.5	0 -0.01	±0.005	h5
0.5 ≤ D ≤ 2.5	0	±0.01	
D > 2.5	-0.02		

※Shank tolerance is h4(JIS), NS TOOL produces within 0.002mm from -0.001mm ~ -0.003mm.

- MUGEN COATING PREMIUM for hardened steels and unique new design excel in chipping prevention and resolve chattering to realize excellent finished surface.
- 4 flutes end mill for higher efficiency.

Beware of stocks because there is no blade to the shaft center of end teeth of $\phi 0.1$ to $\phi 0.3$.

[Neck Shape]
(γ) is reference value. Tool measurement required in order to avoid interference to the work material.


Code No.	Dia. (D)	Corner Radius (R)	Under Neck Length (l1)	Length of Cut (l)	Neck Dia. (d2)	Neck Taper Angle (γ)	Shank Dia. (d)	Overall Length (L)	Actual effective length depending on inclined angle of workpiece				
									30°	1°	1°30'	2°	3°
									Unit : mm				

How to Order When you order, indicate MHRH430R (D)×(R)×(l1). ※(γ) is reference value.

Machining case S-025

MHRH430R

MUGEN COATING PREMIUM 4-Flute Long Neck Radius End Mill for Hardened Steel

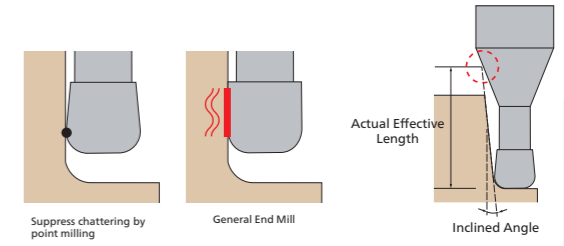

Unit : mm

Code No.	Dia. (D)	Corner Radius (R)	Under Neck Length (l1)	Length of Cut (l)	Neck Dia. (d2)	Neck Taper Angle (γ)	Shank Dia. (d)	Overall Length (L)	Actual effective length depending on inclined angle of workpiece				
									30°	1°	1°30'	2°	3°
									Unit : mm				

P Prehardened Steel

H ~55 HRC Hardened Steel

H ~65 HRC Hardened Steel

M Stainless Steel

S Titanium Alloy Heat Resistant Alloy

Long Neck Corner Radius Coating

Prehardened Steel P
Hardened Steel ~55 HRC H
Hardened Steel ~65 HRC H

Stainless Steel M
Titanium Alloy Heat Resistant Alloy S

Long Neck Corner Radius Coating

Work Material			Prehardened Steels HPM·NAK (~42HRC)				Hardened Steels HPM38·STAVAX·SKD61 (~55HRC)				Hardened Steels SKD11·PD613 (~62HRC)				High Speed Steels SKH (~65HRC)								
Dia.	Corner Radius	Under Neck Length	Spindle Speed	Feed	Depth of Cut		Spindle Speed	Feed	Depth of Cut		Spindle Speed	Feed	Depth of Cut		Spindle Speed	Feed	Depth of Cut						
			min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm	
0.1	0.01	0.3	40,000	240	0.004	0.03	40,000	200	0.003	0.02	40,000	160	0.002	0.01	40,000	120	0.002	0.01					
			40,000	180	0.003	0.03	40,000	150	0.002	0.02	40,000	120	0.001	0.01	40,000	90	0.001	0.01					
			40,000	360	0.004	0.04	40,000	300	0.003	0.03	40,000	240	0.002	0.015	40,000	180	0.002	0.01					
	0.01	0.5	0.3	40,000	240	0.004	0.04	40,000	200	0.003	0.03	40,000	160	0.002	0.015	40,000	120	0.002	0.01				
				40,000	180	0.003	0.04	40,000	150	0.002	0.03	40,000	120	0.001	0.015	40,000	90	0.001	0.01				
				40,000	360	0.003	0.04	40,000	300	0.002	0.03	40,000	240	0.001	0.015	40,000	180	0.001	0.01				
	0.15	0.01	1	40,000	100	0.003	0.04	40,000	80	0.002	0.03	40,000	65	0.001	0.015	40,000	50	0.001	0.01				
				40,000	360	0.004	0.04	40,000	300	0.003	0.03	40,000	240	0.002	0.015	40,000	180	0.002	0.01				
				40,000	240	0.004	0.04	40,000	200	0.003	0.03	40,000	160	0.002	0.015	40,000	120	0.002	0.01				
	0.15	0.02	0.75	40,000	180	0.003	0.04	40,000	150	0.002	0.03	40,000	120	0.001	0.015	40,000	90	0.001	0.01				
				40,000	360	0.003	0.04	40,000	300	0.002	0.03	40,000	240	0.001	0.015	40,000	180	0.001	0.01				
				40,000	240	0.003	0.04	40,000	200	0.002	0.03	40,000	160	0.001	0.015	40,000	120	0.001	0.01				
0.2	0.02	1	40,000	100	0.003	0.04	40,000	80	0.002	0.03	40,000	65	0.001	0.015	40,000	50	0.001	0.01					
			30,000	480	0.005	0.05	30,000	400	0.003	0.04	30,000	320	0.003	0.02	30,000	240	0.003	0.01					
			30,000	360	0.005	0.05	30,000	300	0.003	0.04	30,000	240	0.002	0.02	30,000	160	0.002	0.01					
0.2	0.05	1.5	30,000	240	0.004	0.05	30,000	200	0.002	0.04	30,000	160	0.002	0.02	30,000	120	0.001	0.01					
			30,000	140	0.003	0.05	30,000	100	0.002	0.04	30,000	80	0.001	0.02	30,000	60	0.001	0.01					
			30,000	480	0.01	0.05	30,000	400	0.003	0.04	30,000	320	0.003	0.02	30,000	240	0.003	0.01					
0.3	0.02	1	30,000	360	0.007	0.05	30,000	300	0.003	0.04	30,000	240	0.003	0.02	30,000	160	0.003	0.01					
			30,000	240	0.007	0.05	30,000	200	0.002	0.04	30,000	160	0.003	0.02	30,000	120	0.003	0.01					
			30,000	140	0.003	0.05	30,000	100	0.002	0.04	30,000	80	0.002	0.02	30,000	60	0.002	0.01					
0.3	0.05	1.5	30,000	480	0.01	0.1	30,000	400	0.003	0.08	30,000	320	0.003	0.04	30,000	240	0.003	0.03					
			30,000	360	0.007	0.1	30,000	300	0.003	0.08	30,000	240	0.003	0.04	25,000	200	0.003	0.03					
			30,000	300	0.005	0.1	25,000	200	0.002	0.08	25,000	160	0.002	0.04	20,000	120	0.002	0.03					
0.4	0.02	1	30,000	700	0.015	0.1	30,000	600	0.003	0.08	30,000	500	0.003	0.04	30,000	400	0.003	0.03					
			30,000	480	0.01	0.1	30,000	400	0.003	0.08	30,000	320	0.003	0.04	30,000	240	0.003	0.03					
			30,000	360	0.007	0.1	30,000	300	0.003	0.08	30,000	240	0.003	0.04	25,000	200	0.003	0.03					
0.4	0.05	1.5	30,000	700	0.02	0.1	30,000	600	0.003	0.08	30,000	500	0.003	0.04	30,000	400	0.003	0.03					
			30,000	480	0.015	0.1	30,000	400	0.003	0.08	30,000	320	0.003	0.04	30,000	240	0.003	0.03					
			30,000	360	0.01	0.1	30,000	300	0.003	0.08	30,000	240	0.003	0.04	25,000	200	0.003	0.03					
0.5	0.02	1	30,000	900	0.015	0.12	30,000	800	0.005	0.1	28,000	700	0.005	0.05	25,000	600	0.004	0.04					
			30,000	800	0.012	0.12	30,000	700	0.005	0.1	28,000	600	0.005	0.05	25,000	520	0.004	0.04					
			30,000	720	0.01	0.12	30,000	600	0.005	0.1	25,000	500	0.005	0.05	25,000	440	0.003	0.04					
0.5	0.05	1.5	30,000	680	0.008	0.12	28,000	560	0.004	0.1	25,000	480	0.004	0.05	20,000	360	0.003	0.04					
			30,000	640	0.008	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.002	0.04					
			30,000	500	0.006	0.12	25,000	400	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
0.6	0.02	1	30,000	900	0.025	0.12	30,000	800	0.005	0.1	28,000	700	0.005	0.05	25,000	600	0.005	0.04					
			30,000	800	0.022	0.12	30,000	700	0.005	0.1	28,000	600	0.005	0.05	25,000	520	0.005	0.04					
			30,000	720	0.02	0.12	30,000	600	0.005	0.1	25,000	500	0.005	0.05	25,000	440	0.005	0.04					
0.6	0.05	1.5	30,000	680	0.015	0.12	28,000	560	0.004	0.1	25,000	480	0.004	0.05	20,000	360	0.004	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
			30,000	500	0.01	0.12	25,000	400	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
0.7	0.02	1	30,000	900	0.025	0.12	30,000	800	0.005	0.1	28,000	700	0.005	0.05	25,000	600	0.005	0.04					
			30,000	720	0.02	0.12	30,000	600	0.005	0.1	25,000	500	0.005	0.05	25,000	440	0.005	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
0.7	0.05	1.5	30,000	900	0.01	0.12	25,000	800	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
			30,000	720	0.01	0.12	25,000	600	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
0.8	0.02	1	30,000	900	0.025	0.12	30,000	800	0.005	0.1	28,000	700	0.005	0.05	25,000	600	0.005	0.04					
			30,000	720	0.02	0.12	30,000	600	0.005	0.1	25,000	500	0.005	0.05	25,000	440	0.005	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
0.8	0.05	1.5	30,000	900	0.01	0.12	25,000	800	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
			30,000	720	0.01	0.12	25,000	600	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
0.9	0.02	1	30,000	900	0.025	0.12	30,000	800	0.005	0.1	28,000	700	0.005	0.05	25,000	600	0.005	0.04					
			30,000	720	0.02	0.12	30,000	600	0.005	0.1	25,000	500	0.005	0.05	25,000	440	0.005	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
0.9	0.05	1.5	30,000	900	0.01	0.12	25,000	800	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
			30,000	720	0.01	0.12	25,000	600	0.003	0.1	20,000	320	0.002	0.05	18,000	240	0.002	0.04					
			30,000	640	0.015	0.12	25,000	500	0.004	0.1	23,000	440	0.003	0.05	18,000	320	0.003	0.04					
1.0	0.02	1	30,000	1,200	0.016	0.14	25,000	1,000	0.008	0.15	23,000	900	0.006	0.1	20,000	800	0.004	0.08					
			30,000	1,000	0.014	0.14	25,000	840	0.007	0.15	23,000	720	0.005	0.1	20,000	600	0.003	0.08					
			30,000	840	0.012	0.14	25,000	700	0.006	0.15	23,000	640	0.004	0.1	20,000	560	0.003	0.08					
1.0	0.05	1.5	25,000	760	0.01	0.14	25,000	600	0.004	0.15	23,000	480	0.002	0.1</									

Recommended Milling Conditions

Work Material			Prehardened Steels HPM·NAK (~42HRC)				Hardened Steels HPM38·STAVAX·SKD61 (~55HRC)				Hardened Steels SKD11·PD613 (~62HRC)				High Speed Steels SKH (~65HRC)					
Dia.	Corner Radius	Under Neck Length	Spindle Speed	Feed	Depth of Cut		Spindle Speed	Feed	Depth of Cut		Spindle Speed	Feed	Depth of Cut		Spindle Speed	Feed	Depth of Cut			
			min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm	min ⁻¹	mm/min	ap mm	ae mm		
2	0.05 0.1 0.2 0.3 0.5	4	24,000	2,800	0.13	0.7	20,000	2,300	0.06	0.6	17,000	2,000	0.05	0.5	14,000	1,400	0.03	0.35		
		6	22,000	2,500	0.12	0.7	18,000	2,100	0.06	0.6	15,000	1,800	0.05	0.5	12,000	1,300	0.03	0.35		
		8	20,000	2,200	0.11	0.7	16,000	1,800	0.05	0.6	14,000	1,500	0.04	0.5	11,000	1,100	0.02	0.35		
		12	16,000	1,700	0.09	0.7	13,000	1,400	0.04	0.6	11,000	1,200	0.03	0.5	9,000	850	0.01	0.35		
		16	14,000	1,400	0.07	0.7	11,000	1,100	0.03	0.6	9,500	950	0.02	0.5	7,500	650	0.007	0.35		
		20	10,000	800	0.05	0.7	8,000	650	0.02	0.6	7,000	550	0.01	0.5	5,500	400	0.005	0.35		
		2.5	0.1 0.2 0.3 0.5	10	16,000	2,200	0.14	0.85	13,000	1,800	0.07	0.7	11,000	1,500	0.05	0.5	9,000	1,100	0.03	0.5
		20	11,000	1,400	0.08	0.85	9,000	1,100	0.04	0.7	7,500	950	0.02	0.5	6,000	650	0.01	0.5		
		30	7,000	800	0.03	0.85	5,500	650	0.01	0.7	4,500	550	0.01	0.5	3,500	400	0.005	0.5		
		3	0.05 0.1 0.2 0.3 0.5	4	18,000	2,800	0.18	1	15,000	2,300	0.1	0.8	13,000	2,000	0.07	0.7	10,000	1,400	0.05	0.6
6	16,000			2,500	0.17	1	13,000	2,100	0.1	0.8	11,000	1,800	0.07	0.7	9,000	1,300	0.05	0.6		
8	14,000			2,200	0.16	1	11,000	1,800	0.1	0.8	9,500	1,500	0.07	0.7	7,500	1,100	0.05	0.6		
12	13,500			2,000	0.16	1	11,000	1,600	0.08	0.8	9,500	1,400	0.06	0.7	7,500	1,000	0.04	0.6		
16	12,000			1,800	0.14	1	10,000	1,500	0.07	0.8	8,500	1,300	0.05	0.7	7,000	900	0.03	0.6		
20	10,000			1,400	0.12	1	8,000	1,100	0.05	0.8	7,000	950	0.04	0.7	5,500	700	0.02	0.6		
4	18,000			2,800	0.18	1	15,000	2,300	0.1	0.8	13,000	2,000	0.07	0.7	10,000	1,400	0.05	0.6		
6	16,000			2,500	0.17	1	13,000	2,100	0.1	0.8	11,000	1,800	0.07	0.7	9,000	1,300	0.05	0.6		
8	14,000			2,200	0.16	1	11,000	1,800	0.1	0.8	9,500	1,500	0.07	0.7	7,500	1,100	0.05	0.6		
12	13,500			2,000	0.16	1	11,000	1,600	0.08	0.8	9,500	1,400	0.06	0.7	7,500	1,000	0.04	0.6		
3	0.1 0.2 0.3 0.5	16	12,000	1,800	0.14	1	10,000	1,500	0.07	0.8	8,500	1,300	0.05	0.7	7,000	900	0.03	0.6		
		20	10,000	1,400	0.12	1	8,000	1,100	0.05	0.8	7,000	950	0.04	0.7	5,500	700	0.02	0.6		
		25	9,000	1,200	0.08	1	7,500	1,000	0.04	0.8	6,500	850	0.02	0.7	5,000	600	0.01	0.6		
		30	8,000	800	0.06	1	6,500	650	0.03	0.8	5,500	550	0.02	0.7	4,500	400	0.007	0.6		
		8	14,000	2,200	0.16	1	11,000	1,800	0.1	0.8	9,500	1,500	0.07	0.7	7,500	1,100	0.05	0.6		
		12	13,500	2,000	0.16	1	11,000	1,600	0.08	0.8	9,500	1,400	0.06	0.7	7,500	1,000	0.04	0.6		
		16	12,000	1,800	0.14	1	10,000	1,500	0.07	0.8	8,500	1,300	0.05	0.7	7,000	900	0.03	0.6		
		20	10,000	1,400	0.12	1	8,000	1,100	0.05	0.8	7,000	950	0.04	0.7	5,500	700	0.02	0.6		
		25	9,000	1,200	0.08	1	7,500	1,000	0.04	0.8	6,500	850	0.02	0.7	5,000	600	0.01	0.6		
		30	8,000	800	0.06	1	6,500	650	0.03	0.8	5,500	550	0.02	0.7	4,500	400	0.007	0.6		
4	0.1 0.2 0.3 0.5 1	8	12,000	2,600	0.25	1.4	10,000	2,100	0.15	1.2	8,500	1,800	0.08	1	7,000	1,300	0.06	0.8		
		12	12,000	2,600	0.25	1.4	10,000	2,100	0.15	1.2	8,500	1,800	0.08	1	7,000	1,300	0.06	0.8		
		16	10,000	2,200	0.17	1.4	8,000	1,800	0.1	1.2	7,000	1,500	0.06	1	5,500	1,100	0.05	0.8		
		24	8,000	1,600	0.14	1.4	6,500	1,300	0.08	1.2	5,500	1,100	0.05	1	4,500	750	0.03	0.8		
		32	6,500	1,300	0.08	1.4	5,500	1,100	0.04	1.2	4,500	950	0.02	1	3,500	650	0.01	0.8		
		5	0.1 0.2 0.3 0.5 1	15	9,500	2,400	0.25	2.2	8,000	2,000	0.15	2	7,000	1,700	0.08	1.6	5,500	1,200	0.06	1.2
		20	8,000	2,000	0.18	2.2	6,500	1,600	0.1	2	5,500	1,400	0.07	1.6	4,500	1,000	0.05	1.2		
		40	5,000	1,200	0.09	2.2	4,000	1,000	0.05	2	3,500	850	0.02	1.6	3,000	600	0.01	1.2		
		6	0.1 0.2 0.3 0.5 1	12	8,000	2,500	0.35	2.7	6,500	2,100	0.18	2.5	5,500	1,800	0.08	2	4,500	1,300	0.06	1.5
		18	7,000	2,200	0.3	2.7	5,500	1,800	0.18	2.5	4,500	1,500	0.08	2	3,500	1,100	0.06	1.5		
24	6,000	1,800	0.2	2.7	5,000	1,500	0.15	2.5	4,000	1,300	0.07	2	3,000	900	0.05	1.5				
48	3,000	900	0.1	2.7	2,500	750	0.05	2.5	2,000	650	0.03	2	2,000	450	0.02	1.5				

Notes

- ※1 Adjust milling conditions according to milling shape and machine type.
- ※2 ap : Axial Depth of Cut, ae : Radial Depth of Cut.
- ※3 Recommend to use oil mist coolant for machining hardened steels.
- ※4 Recommend to apply helical or ramping for approaching into axial direction.
- ※5 Adjust feed rate 50% lower and cutting depth (ae) 30% lower for milling deep wall area when L/D exceeds 8 for stable milling.
- ※6 For slotting, recommend reciprocating milling by adjusting feed & ap in below 50% of recommended milling condition.
- ※7 Reduce both spindle speed and feed at same rate for chattering and also for insufficient spindle speed of a machine.



Regular Line MUGEN COATING PREMIUM

P Prehardened Steel

H ~55 HRC Hardened Steel

H ~65 HRC Hardened Steel

M Stainless Steel

S Titanium Alloy Heat Resistant Alloy

Long Neck Corner Radius Coating