


MUGEN COATING PREMIUM Plus 2-Flute Long Neck Ball End Mill with Short Shank for Hardened Steel and High accuracy cutting

Total 83 sizes


High precision and long tool life even for hardened steels up to 70HRC

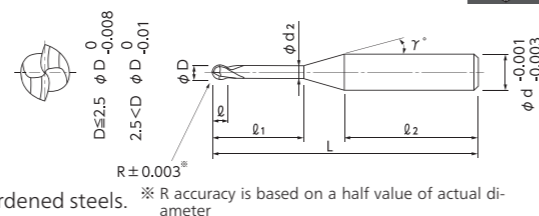

- Realize stable cutting performance even for 70 HRC hardened steels. ※ R accuracy is based on a half value of actual diameter
- Developed new MUGEN COATING PREMIUM Plus to upgrade oxidation resistance and abrasion resistance.
- Adopt optimized new tool material and tool design to reduce cutting load.
- R accuracy is ± 0.003 mm (R accuracy is based on a half value of actual diameter).
- Shank diameter tolerance, high accuracy type, is -0.001 mm / -0.003 mm.




Leaflet

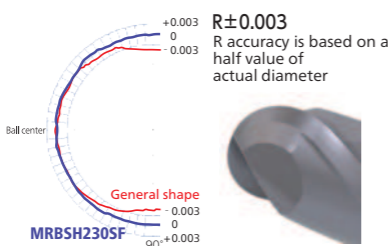

Seamless design on rake face and flank face from R-curve to peripheral cutting edge. Realized high precision R accuracy



General End Mill



Inclined Angle

Unit : mm

Code No.	Radius (R)	Under Neck Length (l ₁)	Length of Cut (l)	Dia. (D)	Neck Dia. (d ₂)	Neck Taper Angle (γ)	Shank Dia. (d)	Shank Length (l ₂)	Overall Length (L)	Actual effective length depending on inclined angle of workpiece				
										30°	1°	1°30'	2°	3°
08-00537-00052	R0.05	0.2	0.07	0.1	0.085	15°	4	27.4	35	0.23	0.24	0.24	0.25	0.27
08-00537-00053		0.3	0.07	0.1	0.085	15°	4	27.3	35	0.33	0.34	0.35	0.36	0.39
08-00537-00055		0.5	0.07	0.1	0.085	15°	4	27.1	35	0.54	0.56	0.57	0.59	0.64
08-00537-00072	R0.075	0.3	0.1	0.15	0.13	15°	4	27.4	35	0.34	0.35	0.36	0.37	0.40
08-00537-00073		0.5	0.1	0.15	0.13	15°	4	27.2	35	0.55	0.56	0.58	0.60	0.65
08-00537-00101	R0.1	0.3	0.15	0.2	0.18	15°	4	27.5	35	0.34	0.35	0.36	0.37	0.39
08-00537-00102		0.5	0.15	0.2	0.18	15°	4	27.3	35	0.55	0.56	0.58	0.60	0.64
08-00537-00103		0.75	0.15	0.2	0.18	15°	4	27.1	35	0.81	0.83	0.86	0.89	0.95
08-00537-00105	R0.15	1	0.15	0.2	0.18	15°	4	26.8	35	1.06	1.10	1.13	1.17	1.26
08-00537-00150		0.5	0.2	0.3	0.28	15°	4	27.5	35	0.55	0.56	0.57	0.59	0.63
08-00537-00151		0.6	0.2	0.3	0.28	15°	4	27.4	35	0.65	0.67	0.69	0.71	0.75
08-00537-00152	R0.15	0.75	0.2	0.3	0.28	15°	4	27.3	35	0.80	0.83	0.85	0.88	0.94
08-00537-00153		1	0.2	0.3	0.28	15°	4	27.0	35	1.06	1.09	1.13	1.17	1.25
08-00537-00155		1.5	0.2	0.3	0.28	15°	4	26.5	35	1.58	1.63	1.68	1.74	1.87
08-00537-00201	R0.2	0.5	0.3	0.4	0.37	15°	4	27.7	35	0.56	0.58	0.59	0.60	0.64
08-00537-00202		0.8	0.3	0.4	0.37	15°	4	27.4	35	0.87	0.90	0.92	0.95	1.01
08-00537-00203		1	0.3	0.4	0.37	15°	4	27.2	35	1.08	1.11	1.14	1.18	1.26
08-00537-00204	R0.2	1.5	0.3	0.4	0.37	15°	4	26.7	35	1.60	1.65	1.70	1.75	1.88
08-00537-00205		2	0.3	0.4	0.37	15°	4	26.2	35	2.11	2.18	2.25	2.33	2.50
08-00537-00206		2.5	0.3	0.4	0.37	15°	4	25.7	35	2.63	2.72	2.81	2.90	3.13
08-00537-00252	R0.25	1	0.35	0.5	0.46	15°	4	27.3	35	1.10	1.13	1.16	1.19	1.27
08-00537-00253		1.5	0.35	0.5	0.46	15°	4	26.8	35	1.61	1.66	1.71	1.77	1.89
08-00537-00254		2	0.35	0.5	0.46	15°	4	26.3	35	2.13	2.20	2.27	2.34	2.51
08-00537-00255	R0.25	2.5	0.35	0.5	0.46	15°	4	25.8	35	2.65	2.73	2.82	2.92	3.14
08-00537-00256		3	0.35	0.5	0.46	15°	4	25.3	35	3.16	3.27	3.38	3.49	3.76


How to Order When you order, indicate MRBSH230SF (R)×(l₁). ※(γ) is reference value.

Machining case S-018, S-019

MUGEN COATING PREMIUM Plus 2-Flute Long Neck Ball End Mill with Short Shank for Hardened Steel and High accuracy cutting

Unit : mm

Code No.	Radius (R)	Under Neck Length (l ₁)	Length of Cut (l)	Dia. (D)	Neck Dia. (d ₂)	Neck Taper Angle (γ)	Shank Dia. (d)	Shank Length (l ₂)	Overall Length (L)	Actual effective length depending on inclined angle of workpiece					
										30°	1°	1°30'	2°	3°	
08-00537-00300	R0.3	1	0.45	0.6	0.56	15°	4	27.5	35	1.10	1.12	1.15	1.19	1.26	
08-00537-00301		1.5	0.45	0.6	0.56	15°	4	27.0	35	1.61	1.66	1.71	1.76	1.88	
08-00537-00302		2	0.45	0.6	0.56	15°	4	26.5	35	2.13	2.19	2.26	2.34	2.50	
08-00537-00303		2.5	0.45	0.6	0.56	15°	4	26.0	35	2.65	2.73	2.82	2.91	3.12	
08-00537-00304		3	0.45	0.6	0.56	15°	4	25.5	35	3.16	3.26	3.37	3.49	3.75	
08-00537-00305		3.5	0.45	0.6	0.56	15°	4	25.0	35	3.68	3.80	3.92	4.06	4.37	
08-00537-00306	R0.4	4	0.45	0.6	0.56	15°	4	29.5	40	4.20	4.33	4.48	4.64	4.99	
08-00537-00402		2	0.6	0.8	0.76	15°	4	26.9	35	2.13	2.19	2.25	2.32	2.48	
08-00537-00403		3	0.6	0.8	0.76	15°	4	25.9	35	3.16	3.26	3.36	3.47	3.72	
08-00537-00405		4	0.6	0.8	0.76	15°	4	24.9	35	4.19	4.33	4.47	4.62	4.97	
08-00537-00406	R0.5	5	0.6	0.8	0.76	15°	4	28.9	40	5.23	5.40	5.58	5.77	6.21	
08-00537-00501		2	0.75	1	0.95	15°	4	27.3	35	2.14	2.20	2.26	2.33	2.48	
08-00537-00502		2.5	0.75	1	0.95	15°	4	26.8	35	2.66	2.73	2.82	2.90	3.10	
08-00537-00503		3	0.75	1	0.95	15°	4	26.3	35	3.18	3.27	3.37	3.48	3.72	
08-00537-00504		4	0.75	1	0.95	15°	4	25.3	35	4.21	4.34	4.48	4.63	4.97	
08-00537-00505		5	0.75	1	0.95	15°	4	29.3	40	5.24	5.41	5.59	5.78	6.21	
08-00537-00506	6	0.75	1	0.95	15°	4	28.3	40	6.28	6.48	6.69	6.93	7.45		
08-00537-00602	R0.6	2.4	0.9	1.2	1.15	15°	4	27.2	35	2.55	2.62	2.69	2.77	2.95	
08-00537-00603		4	0.9	1.2	1.15	15°	4	25.6	35	4.21	4.33	4.47	4.61	4.94	
08-00537-00605		6	0.9	1.2	1.15	15°	4	28.6	40	6.27	6.47	6.68	6.91	7.43	
08-00537-00606	R0.75	8	0.9	1.2	1.15	15°	4	26.6	40	8.34	8.61	8.90	9.21	9.91	
08-00537-00752		3	1.1	1.5	1.45	15°	4	27.2	35	3.17	3.25	3.34	3.44	3.66	
08-00537-00753		4	1.1	1.5	1.45	15°	4	26.2	35	4.20	4.32	4.45	4.59	4.91	
08-00537-00754		6	1.1	1.5	1.45	15°	4	29.2	40	6.27	6.46	6.67	6.89	7.39	
08-00537-00755	R0.75	8	1.1	1.5	1.45	15°	4	27.2	40	8.34	8.60	8.88	9.19	9.88	
08-00537-00756		10	1.1	1.5	1.45	15°	4	25.2	40	10.40	10.74	11.10	11.49	12.36	
08-00537-00805	R0.8	8	1.2	1.6	1.55	15°	4	27.4	40	8.33	8.60	8.88	9.18	9.87	
08-00537-01000	R1	3	1.5	2	1.94	15°	4	28.1	35	3.18	3.25	3.34	3.43	3.63	
08-00537-01001		4	1.5	2	1.94	15°	4	27.1	35	4.21	4.32	4.45	4.58	4.87	
08-00537-01002		6	1.5	2	1.94	15°	4	25.1	35	6.28	6.46	6.66	6.88	7.36	
08-00537-01003		8	1.5	2	1.94	15°	4	28.1	40	8.35	8.60	8.88	9.18	9.84	
08-00537-01004		10	1.5	2	1.94	15°	4	26.1	40	10.41	10.74	11.10	11.48	12.33	
08-00537-01005		12	1.5	2	1.94	15°	4	29.1	45	12.48	12.88	13.31	13.77	14.82	
08-00537-01252	R1.25	6	2.3	2.5	2.4	15°	4	26.0	35	6.35	6.53	6.72	6.92	7.39	
08-00537-01253		8	2.3	2.5	2.4	15°	4	29.0	40	8.42	8.67	8.93	9.22	9.88	
08-00537-01254		10	2.3	2.5	2.4	15°	4	27.0	40	10.48	10.81	11.15	11.52	12.36	
08-00537-01256	R1.5	15	2.3	2.5	2.4	15°	4	27.0	45	15.65	16.15	16.69	17.27	Free	
08-00537-01500		6	2.5	3	2.85	15°	6	33.1	45	6.44	6.61	6.79	7.00	7.45	
08-00537-01501		8	2.5	3	2.85	15°	6	31.1	45	8.50	8.75	9.01	9.29	9.93	
08-00537-01502		10	2.5	3	2.85	15°	6	29.1	45	10.57	10.89	11.23	11.59	12.42	
08-00537-01503	R1.5	12	2.5	3	2.85	15°	6	27.1	45	12.64	13.03	13.44	13.89	14.91	
08-00537-01504		14	2.5	3	2.85	15°	6	30.1	50	14.71	15.17	15.66	16.19	17.39	
08-00537-01505		16	2.5	3	2.85	15°	6	28.1	50	16.77	17.31	17.88	18.49	19.88	
08-00537-01506		20	2.5	3	2.85	15°	6	29.1	55	20.91	21.58	22.31	23.09	24.85	
08-00537-02000		R2	8	3	4	3.8	15°	6	32.8	45	8.58	8.81	9.06	9.33	9.93
08-00537-02001			10	3	4	3.8	15°	6	30.8	45	10.65	10.95	11.28	11.63	12.42
08-00537-02002	12		3	4	3.8	15°	6	28.8	45	12.72	13.09	13.49	13.93	14.90	
08-00537-02004	15		3	4	3.8	15°	6	30.8	50	15.82	16.30	16.82	17.38	18.63	
08-00537-02005	20		3	4	3.8	15°	6	30.8	55	20.99	21.65	22.36	23.13	Free	
08-00537-02006	25		3	4	3.8	15°	6	30.8	60	26.16	27.00	27.90	28.88	Free	
08-00537-02502	R2.5	10	3.5	5	4.8	15°	6	32.7	45	10.63	10.92	11.22	11.55	Free	
08-00537-02503		15	3.5	5	4.8	15°	6	27.7	45	15.80	16.27	1			



Work Material			SKH51·SKD11 (~62HRC)				High Speed Steels SKH55·HAP40 (~66HRC)				High Speed Steels SKH57·HAP72 (~70HRC)			
Radius	Under Neck Length	L/D	Depth of Cut		Feed	Spindle Speed	Depth of Cut		Feed	Spindle Speed	Depth of Cut		Feed	Spindle Speed
			ap mm	ae mm	mm/min	min ⁻¹	ap mm	ae mm	mm/min	min ⁻¹	ap mm	ae mm	mm/min	min ⁻¹
R0.05	0.2	2	0.002	0.005	100	40,000	0.002	0.003	70	40,000	0.002	0.003	50	40,000
	0.3	3	0.002	0.005	70	40,000	0.002	0.003	50	40,000	0.002	0.003	40	40,000
	0.5	5	0.001	0.003	50	40,000	0.001	0.002	30	40,000	0.001	0.002	20	40,000
R0.075	0.3	2	0.002	0.005	150	40,000	0.002	0.003	100	40,000	0.002	0.003	80	40,000
	0.5	3.3	0.002	0.005	120	40,000	0.002	0.003	70	40,000	0.002	0.003	50	40,000
	0.3	1.5	0.005	0.005	300	40,000	0.003	0.003	200	40,000	0.003	0.003	150	40,000
R0.1	0.5	2.5	0.005	0.005	280	40,000	0.003	0.003	180	40,000	0.003	0.003	130	40,000
	0.75	3.75	0.003	0.005	200	40,000	0.002	0.003	150	40,000	0.002	0.003	110	40,000
	1	5	0.002	0.003	160	40,000	0.001	0.002	120	40,000	0.001	0.002	90	40,000
R0.15	0.5	1.7	0.007	0.01	300	40,000	0.003	0.005	280	40,000	0.003	0.005	210	40,000
	0.6	2	0.005	0.007	300	40,000	0.003	0.005	250	40,000	0.003	0.005	180	40,000
	0.75	2.5	0.005	0.007	280	40,000	0.003	0.005	230	40,000	0.003	0.005	170	40,000
R0.2	1	3.3	0.005	0.007	250	40,000	0.003	0.005	200	40,000	0.003	0.005	150	40,000
	1.5	5	0.003	0.005	180	40,000	0.002	0.003	120	40,000	0.002	0.003	90	40,000
	0.5	1.25	0.03	0.03	720	40,000	0.009	0.02	580	40,000	0.009	0.02	420	35,000
R0.25	0.8	2	0.02	0.03	720	40,000	0.008	0.02	580	40,000	0.008	0.02	420	35,000
	1	2.5	0.02	0.03	720	40,000	0.008	0.02	580	40,000	0.008	0.02	400	35,000
	1.5	3.75	0.01	0.02	500	40,000	0.005	0.01	400	40,000	0.005	0.01	280	35,000
R0.3	2	5	0.007	0.01	380	40,000	0.005	0.007	300	40,000	0.005	0.007	220	35,000
	2.5	6.25	0.005	0.007	300	40,000	0.003	0.005	260	40,000	0.003	0.005	190	35,000
	1	2	0.02	0.03	860	40,000	0.01	0.02	650	35,000	0.01	0.02	450	30,000
R0.35	1.5	3	0.01	0.03	720	40,000	0.007	0.02	520	35,000	0.007	0.02	350	30,000
	2	4	0.01	0.02	650	40,000	0.007	0.01	400	35,000	0.007	0.01	270	30,000
	2.5	5	0.007	0.01	530	40,000	0.005	0.007	360	35,000	0.005	0.007	240	30,000
R0.4	3	6	0.007	0.01	420	35,000	0.005	0.007	320	35,000	0.005	0.007	220	30,000
	1	1.7	0.03	0.06	1,000	40,000	0.02	0.05	720	30,000	0.02	0.05	540	25,000
	1.5	2.5	0.03	0.06	1,000	40,000	0.02	0.05	720	30,000	0.02	0.05	540	25,000
R0.45	2	3.3	0.03	0.06	1,000	40,000	0.02	0.05	720	30,000	0.02	0.05	540	25,000
	2.5	4.1	0.02	0.04	840	40,000	0.02	0.03	640	30,000	0.02	0.03	480	25,000
	3	5	0.02	0.04	840	40,000	0.02	0.03	600	30,000	0.02	0.03	450	25,000
R0.5	3.5	5.9	0.01	0.03	600	30,000	0.01	0.02	420	30,000	0.01	0.02	310	25,000
	4	6.7	0.01	0.03	600	30,000	0.01	0.02	420	30,000	0.01	0.02	310	25,000
	2	2.5	0.07	0.1	1,600	35,000	0.05	0.1	1,200	30,000	0.03	0.1	900	25,000
R0.55	3	3.75	0.05	0.1	1,600	35,000	0.05	0.05	1,200	30,000	0.03	0.05	900	25,000
	4	5	0.04	0.06	1,200	30,000	0.03	0.05	860	25,000	0.02	0.05	640	20,000
	5	6.25	0.03	0.05	1,000	25,000	0.02	0.03	620	25,000	0.015	0.03	460	20,000
R0.6	2	2	0.1	0.2	2,000	30,000	0.08	0.1	1,400	25,000	0.05	0.1	1,000	20,000
	2.5	2.5	0.1	0.2	2,000	30,000	0.08	0.1	1,400	25,000	0.05	0.1	1,000	20,000
	3	3	0.1	0.2	2,000	30,000	0.08	0.1	1,400	25,000	0.05	0.1	1,000	20,000
R0.65	4	4	0.05	0.15	1,600	28,000	0.05	0.1	1,200	25,000	0.03	0.1	900	20,000
	5	5	0.04	0.1	1,400	25,000	0.03	0.05	920	20,000	0.02	0.05	700	16,000
	6	6	0.04	0.05	1,200	22,000	0.02	0.05	740	20,000	0.015	0.05	550	16,000
R0.7	2.4	2	0.1	0.2	2,000	30,000	0.08	0.1	1,600	25,000	0.05	0.1	1,200	20,000
	4	3.3	0.1	0.2	2,000	30,000	0.06	0.1	1,600	25,000	0.05	0.1	1,200	20,000
	6	5	0.05	0.1	1,400	25,000	0.03	0.07	1,000	20,000	0.02	0.07	750	16,000
R0.75	8	6.7	0.03	0.07	1,200	22,000	0.02	0.05	850	20,000	0.015	0.05	650	16,000
	3	2	0.1	0.3	2,500	30,000	0.1	0.2	2,000	25,000	0.06	0.2	1,500	20,000
	4	2.7	0.1	0.3	2,000	25,000	0.1	0.2	1,600	22,000	0.06	0.2	1,200	18,000
R0.8	6	4	0.1	0.2	1,600	22,000	0.1	0.1	1,200	20,000	0.06	0.1	950	16,000
	8	5.3	0.05	0.2	1,400	20,000	0.05	0.1	1,000	18,000	0.03	0.1	700	13,000
	10	6.7	0.05	0.1	1,200	18,000	0.05	0.05	850	16,000	0.03	0.05	650	13,000
R0.85	8	5	0.07	0.2	1,400	20,000	0.05	0.1	1,000	16,000	0.03	0.1	750	13,000

Work Material			High Speed Steels/Hardened Steels SKH51·SKD11 (~62HRC)				High Speed Steels SKH55·HAP40 (~66HRC)				High Speed Steels SKH57·HAP72 (~70HRC)			
Radius	Under Neck Length	L/D	Depth of Cut		Feed	Spindle Speed	Depth of Cut		Feed	Spindle Speed	Depth of Cut		Feed	Spindle Speed
			ap mm	ae mm	mm/min	min ⁻¹	ap mm	ae mm	mm/min	min ⁻¹	ap mm	ae mm	mm/min	min ⁻¹
R1	3	1.5	0.2	0.5	2,500	25,000	0.15	0.3	2,000	20,000	0.1	0.3	1,500	16,000
	4	2	0.2	0.5	2,500	25,000	0.15	0.3	2,000	20,000	0.1	0.3	1,500	16,000
	6	3	0.2	0.3	2,000	22,000	0.15	0.3	1,600	20,000	0.1	0.3	1,200	16,000
	8	4	0.1	0.2	1,600	18,000	0.1	0.15	1,200	16,000	0.06	0.15	950	13,000
	10	5	0.1	0.2	1,400	16,000	0.1	0.1	1,000	14,000	0.06	0.1	750	11,000
	12	6	0.07	0.1	1,200	14,000	0.05	0.1	850	12,000	0.03	0.1	650	9,500
R1.25	6	2.4	0.2	0.5	2,500	20,000	0.15	0.4	2,000	18,000	0.1	0.4	1,500	14,000
	8	3.2	0.2	0.3	2,100	20,000	0.15	0.3	1,800	18,000	0.1	0.3	1,300	14,000
	10	4	0.15	0.2	1,800	18,000	0.1	0.15	1,500	16,000	0.06	0.15	1,100	13,000
R1.5	15	6	0.07	0.15	1,200	14,000	0.05	0.1	900	12,000	0.03	0.1	700	9,500
	6	2	0.2	0.6	2,500	18,000	0.2	0.5	2,000	15,000	0.12	0.5	1,500	12,000
	8	2.7	0.2	0.6	2,500	18,000	0.2	0.5	2,000	15,000	0.12	0.5	1,500	12,000
R1.5	10	3.3	0.2	0.4	2,100	18,000	0.15	0.3	1,800	15,000	0.1	0.3	1,300	12,000
	12	4	0.2	0.4	2,000	18,000	0.1	0.3	1,500	15,000	0.06	0.3	1,100	12,000
	14	4.7	0.1	0.3	1,600	16,000	0.1	0.2	1,200	12,000	0.06	0.2	900	10,000
	16	5.3	0.1	0.3	1,600	16,000	0.1	0.2	1,200	12,000	0.06	0.2	900	10,000
R2	20	6.7	0.08	0.2	1,200	14,000	0.08	0.1	850	12,000	0.06	0.1	650	9,500
	8	2	0.2	0.8	2,500	15,000	0.2	0.6	2,000	12,000	0.15	0.6	1,500	9,500
	10	2.5	0.2	0.8	2,500	15,000	0.2	0.6	2,000	12,000	0.15	0.6	1,500	9,500
	12	3	0.2	0.8	2,500	15,000	0.2	0.6	2,000	12,000	0.15	0.6	1,500	9,500
R2.5	15	3.75	0.2	0.8	2,000	15,000	0.15	0.6	1,600	12,000	0.12	0.6	1,200	9,500
	20	5	0.1	0.6	1,700	14,000	0.1	0.4	1,200	10,000	0.08	0.4	900	8,000
	25	6.25	0.1	0.4	1,200	14,000	0.1	0.2	850	10,000	0.08	0.2	650	8,000
	10	2	0.2	1.2	2,500	12,000	0.2	0.7	2,000	10,000	0.15	0.7	1,500	8,000
R3	15	3	0.2	1.2	2,500	12,000	0.2	0.7	2,000	10,000	0.15	0.7	1,500	8,000
	20	4	0.2	1	2,000	10,000	0.15	0.6	1,600	8,500	0.12	0.6	1,200	6,500
	10	1.7	0.3	1.2	2,500	8,000	0.2	1	2,000	7,000	0.15	1	1,500	5,500
	15	2.5	0.3	1.2	2,500	8,000	0.2	1	2,000	7,000	0.15	1	1,500	5,500
Notes	20	3.3	0.3	1.2	2,500	8,000	0.2	1	2,000	7,000	0.15	1	1,500	5,500
	25	4.1	0.2	1	2,200	8,000	0.15	0.7	1,600	7,000	0.12	0.7	1,200	5,500
	30	5	0.2	1	1,800	7,000	0.15	0.7	1,300	6,500	0.12	0.7	950	5,000