


5-AXIS Series



Insert for "MIRROR BARREL" TNM type

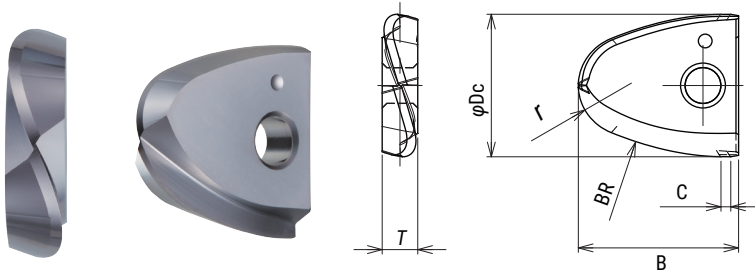

Corner radius accuracy of inserts within $\pm 0.010\text{mm}$




Cat.No.	Grade		Dimensions (mm)					
	JC8015	FZ15	ϕDc	r	BR	B	T	C
TNM-160-NR6BR32	●		16	6	32	4	1	4
TNM-160-NR6BR32		●	16	6	32	4	1	5
TNM-200-NR8BR40	●		20	8	40	5	1	6
TNM-200-NR8BR40		●	20	8	40	5	1	7



MIRROR BARREL Modular head MTP type

Through coolant hole

Accuracy of MTP after combined O.D. run out: below $15\ \mu\text{m}$ (Target below $10\ \mu\text{m}$).
When using TNM type insert / Radius form accuracy on the outer periphery: within $\pm 0.010\text{mm}$.

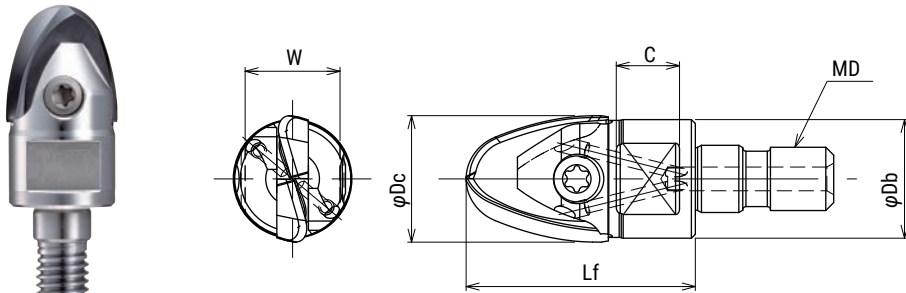



Clamp screw	Torque(N·m)
FSW-4013H	3.0
FSW-5016H	4.0

Cat.No.	Stock	Dimensions (mm)						Inserts	Parts	
		ϕDc	Lf	ϕDb	MD	C	W		Screw	Wrench
MTP-160-M8	●	16	29	15	M8	8	12	TPM-160... TNM-160...	FSW-4013H	A-15
MTP-200-M10	●	20	36	19	M10	8	14	TPM-200... TNM-200...	FSW-5016H	A-20W

5-AXIS Series

TPM
TYPE

Insert for "MIRROR BARREL" TPM type

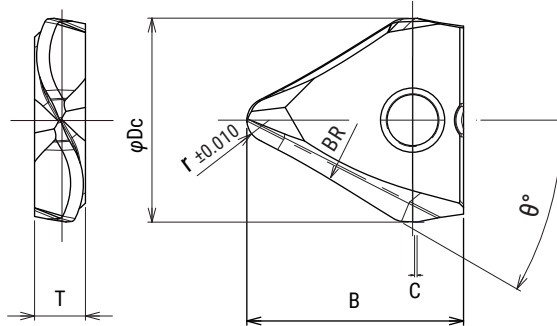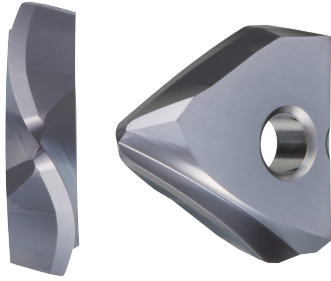

Radius form accuracy on the outer periphery $\pm 0.010\text{mm}$

5
axis

Radius accuracy of inserts within $\pm 0.010\text{mm}$

Cat.No.	Grade		Dimensions (mm)						
	JC8015	DH102	ϕDc	r	BR	B	T	C	θ°
TPM-160-NR2T30BR400	●	●	16	2	400	17	4	1	30°
TPM-200-NR2T30BR500	●	●	20	2	500	20	5	1	30°

MTP
TYPE


MIRROR BARREL Modular head MTP type

Through coolant hole

Accuracy of MTP after combined O.D. run out: below 15 μm (Target below 10 μm).

When using TPM type insert / Corner Radius accuracy: within $\pm 0.010\text{mm}$. Radius form accuracy on the outer periphery: within $\pm 0.010\text{mm}$.

5
axis

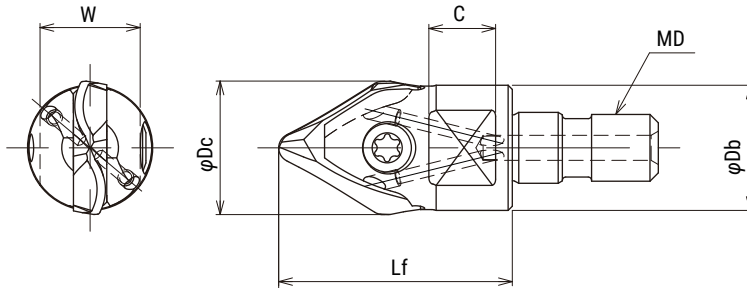

Clamp screw	Torque(N·m)
FSW-4013H	3.0
FSW-5016H	4.0

Cat.No.	Stock	Dimensions (mm)						Inserts	Parts	
		ϕDc	Lf	ϕDb	MD	C	W		Screw	Wrench
MTP-160-M8	●	16	28	15	M8	8	12	TPM-160... TNM-160...	FSW-4013H	A-15
MTP-200-M10	●	20	35	19	M10	9	14	TPM-200... TNM-200...	FSW-5016H	A-20W

5-AXIS Series

■ Recommended cutting conditions



● TNM Type - with Tip R

Material	Grade	Tool dia.(mm)							
		16				20			
		a_p (mm)	a_e (mm)	n (min ⁻¹)	V_f (mm/min)	a_p (mm)	a_e (mm)	n (min ⁻¹)	V_f (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8015	0.15	0.2	10,940	4,380	0.15	0.25	8,750	5,250
Cast steel (GM190, ICD5) below 285HB	JC8015	0.15	0.2	10,940	4,380	0.15	0.25	8,750	5,250
Tool & die steel (SKD61, SKD11) below 255HB	JC8015	0.15	0.2	10,940	4,380	0.15	0.25	8,750	5,250
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8015	0.15	0.2	9,950	3,980	0.15	0.25	7,960	4,780
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8015	0.1	0.2	7,960	2,390	0.1	0.25	6,370	3,190
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	JC8015	0.1	0.2	5,970	1,790	0.1	0.25	4,770	2,390
Grey cast iron (FC250) 160-260HB	JC8015	0.15	0.2	10,940	5,470	0.15	0.25	8,750	6,130
Nodular cast iron (FCD700) 170-300HB	JC8015	0.15	0.2	10,940	5,470	0.15	0.25	8,750	6,130
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8015	0.15	0.2	10,940	4,380	0.15	0.25	8,750	5,250
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8015	0.15	0.2	10,940	4,380	0.15	0.25	8,750	5,250
Titanium alloy (Ti-6Al-4V) 35-43HRC	JC8015	0.1	0.2	7,960	3,180	0.1	0.25	6,370	3,190
Heat resistant alloy (INCO718) 35-43HRC	JC8015	0.1	0.1	5,970	1,790	0.1	0.1	4,770	1,910
Aluminium alloy below 50-110HRC	FZ15	0.25	0.2	13,330	6,670	0.25	0.2	10,660	6,400

Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. These parameters are for overhang length 3Dc. See right table for longer application.
3. In case of chatter occurring, recommended to reduce a_p or rpm and keep feed per tooth.
4. Use air blow.

Overhang (l/Dc)	n (min ⁻¹)	V_f (mm/min)
~ 3Dc	100%	100%
3Dc ~ 5Dc	70%	70%
5Dc ~ 10Dc	50%	50%

5-AXIS Series

■ Recommended cutting conditions




● TPM Type - with Barrel R

Material	Grade	Tool dia.(mm)							
		16				20			
		a_p (mm)	a_e (mm)	n (min ⁻¹)	V_f (mm/min)	a_p (mm)	a_e (mm)	n (min ⁻¹)	V_f (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8015	~4	0.15	13,930	4,180	~5	0.2	11,140	3,340
Cast steel (GM190, ICD5) below 285HB	JC8015	~4	0.15	13,930	4,180	~5	0.2	11,140	3,340
Tool & die steel (SKD61, SKD11) below 255HB	JC8015	~4	0.15	13,930	4,180	~5	0.2	11,140	3,340
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8015	~3.5	0.12	11,940	3,580	~4.5	0.1	9,550	2,870
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8015	~3	0.12	9,950	2,990	~4	0.1	7,960	2,390
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	DH102	~2.5	0.1	6,960	1,390	~3	0.1	5,570	1,110
Hardened die steel (SKD11, SLD, DC11) 55-62HRC	DH102	~2	0.1	5,970	1,190	~2.5	0.1	4,770	950
Grey cast iron (FC250) 160-260HB	DH102	~4	0.15	13,930	5,570	~5	0.2	11,140	4,460
Nodular cast iron (FCD700) 170-300HB	DH102	~4	0.15	13,930	4,180	~5	0.2	11,140	3,340
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8015	~3	0.12	11,940	3,580	~4	0.1	9,550	2,870
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8015	~3	0.12	11,940	3,580	~4	0.1	9,550	2,870
Titanium alloy (Ti-6Al-4V) 35-43HRC	JC8015	~2.5	0.1	5,970	1,190	~3	0.1	4,770	950
Heat resistant alloy (INCO718) 35-43HRC	JC8015	~2.5	0.1	3,980	800	~3	0.1	3,180	640

Please refer to chart and formula below to calculate a_p .

$$a_p = 2 \sqrt{(R^2 - (R - H)^2)}$$



Pick amount a_p (mm)		Cusp height (mm)									
Cat.No.	R	0.001	0.002	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010
TPM-160-NR2T30BR400	400	1.79	2.53	3.10	3.58	4.00	4.38	4.73	5.06	5.73	5.66
TPM-200-NR2T30BR500	500	2.00	2.83	3.46	4.00	4.47	1.39	4.90	5.66	6.00	6.32

Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. These parameters are for overhang length 3Dc. See right table for longer application.
3. In case of chatter occurring, recommended to reduce a_p or rpm and keep feed per tooth.
4. Use air blow.

Overhang (l/Dc)	n (min ⁻¹)	V_f (mm/min)
~ 3Dc	100%	100%
3Dc ~ 5Dc	70%	70%
5Dc ~ 10Dc	50%	50%

5-AXIS Series

■ Recommended cutting conditions



● TPM Type - with Tip R

Material	Grade	Tool dia.(mm)							
		16				20			
		a_p (mm)	a_e (mm)	n (min ⁻¹)	V_f (mm/min)	a_p (mm)	a_e (mm)	n (min ⁻¹)	V_f (mm/min)
Carbon steel (S50C, S55C) below 250HB	JC8015	0.1	0.2	15,920	1,590	0.1	0.2	12,730	1,530
Cast steel (GM190, ICD5) below 285HB	JC8015	0.1	0.2	15,920	1,590	0.1	0.2	12,730	1,530
Tool & die steel (SKD61, SKD11) below 255HB	JC8015	0.1	0.2	15,920	1,590	0.1	0.2	12,730	1,530
Mold steel (HPM7, PX5, P20) 30-36 HRC	JC8015	0.1	0.2	14,920	1,490	0.1	0.2	11,940	1,430
Mold steel (NAK80, HPM1, P21) 38-43HRC	JC8015	0.1	0.2	13,930	1,390	0.1	0.2	11,140	1,110
Hardened die steel (SKD61, DAC, DHA) 42-52HRC	DH102	0.08	0.2	9,950	1,000	0.08	0.2	7,960	960
Hardened die steel (SKD11, SLD, DC11) 55-62HRC	DH102	0.08	0.2	8,950	900	0.08	0.2	7,160	860
Grey cast iron (FC250) 160-260HB	DH102	0.12	0.2	16,910	1,690	0.12	0.2	13,530	1,620
Nodular cast iron (FCD700) 170-300HB	DH102	0.12	0.2	15,920	1,590	0.12	0.2	12,730	1,530
Austenitic stainless steel (SUS304, 316, 317) 17Cr	JC8015	0.1	0.2	14,920	1,490	0.1	0.2	11,940	1,430
Ferritic & martensitic stainless steel (SUS403, 420J2, 430) 13Cr	JC8015	0.1	0.2	14,920	1,490	0.1	0.2	11,940	1,430
Titanium alloy (Ti-6Al-4V) 35-43HRC	JC8015	0.06	0.2	5,970	600	0.06	0.2	4,770	570
Heat resistant alloy (INCO718) 35-43HRC	JC8015	0.05	0.2	3,980	400	0.05	0.2	3,180	380

Note

1. Please adjust cutting conditions according to machine rigidity or work rigidity.
2. These parameters are for overhang length 3Dc. See right table for longer application.
3. In case of chatter occurring, recommended to reduce a_p or rpm and keep feed per tooth.
4. Use air blow.

Overhang (l/D_c)	n (min ⁻¹)	V_f (mm/min)
~ 3Dc	100%	100%
3Dc ~ 5Dc	70%	70%
5Dc ~ 10Dc	50%	50%